


| Application


| Professional IP Camera



| Features

- High quality professional ISP
- Internal 64MB DDR, support up to 4MP
- 68 Pin F " Pin to pin compatible to FH8856V200

| Block Diagram

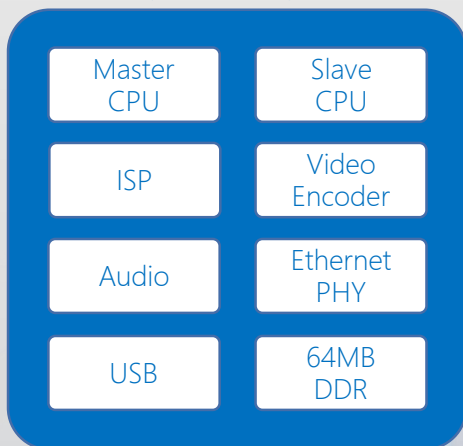

| Specifications

CPU	Master CPU: up to 696MHz Slave CPU: up to 464MHz
CIS	Support up to 4MP inputs 2-lane MIPI, RGB bayer
ISP	2-frame WDR, local tone mapping 2DNR, 3DNR AE/AWB/AF
Video Encoder	H.264/H.265 video encoder Support up to 4MP Support multi-streams: videox2+JPEGx1 JPEG: up to 4MP@5fps
Audio	Single ADC & DAC Support 8K~48KHz sampling rate Support echo cancellation
Ethernet	Internal 10M/100M Ethernet PHY 3xI2C, 3xSPI, 3xUART, 2xSDIO
Peripherals	1xUSB2.0 2xSADC, 12xPWM
Memory	Internal 64MB DDR2
Package	QFN88, 9mmx9mm

| Shanghai

! YX B T2 S * 6
HeXeY4YdYdCX WK Y
DU " ! ! ! !
6 " !

| Shenzhen

B ! ! 3 eT@!
2eYTY W 5 cd
VW W4YdYd CXU XU
DU " #

| Chengdu

! #
2
E5CD3 3 ec 2 #T
V CXe W6
3XU WTe
DU " #

| Hangzhou

"
eY W T*
X W6XU W2eYTY W
2YZY W8 WX e
DU " ! ! # !

c Uc0 V6 X S
Udy W0 V6 X S
V6 X S
cd S # ! # c

